


样品供电电源 SNT 10 50V/20; 12A

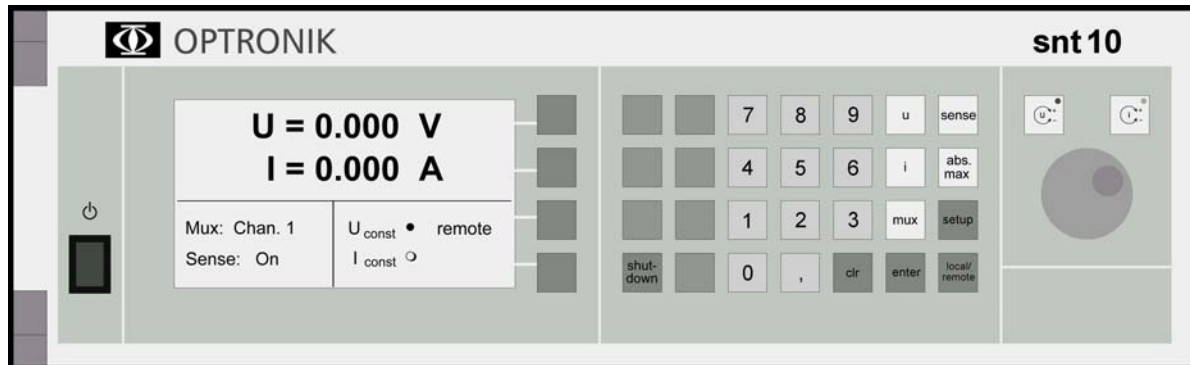

电压	50 V
电源	230 V \pm 10%, 50 Hz
电流	20 A (for U < 18 V)
最大功率	600 W
U 电压设计精度	0.001 V
I 电流设计精度	0.001 A
标准误差	max. \pm 10 mV for 0...50 V max. \pm 10 mA for 0..20 A max. \pm 4 mV for 0...32 V max. \pm 3 mA for 0..6 A typ. \pm 2 mV for 0...20 V typ. \pm 1.5 mA for 0..6 A at \pm 10 % mains voltage modification $<\pm 1 \times 10^{-5}$ from nominal value at no-load/full-load operation $<\pm 1 \times 10^{-5}$ from nominal value more than 8 hours $<\pm 1 \times 10^{-5}$ from nominal value 1x10-5 from nominal value at no-load/full-load operation $<\pm 1 \times 10^{-5}$ from nominal value more than 8 hours $<\pm 1 \times 10^{-5}$ from nominal value
U 电压显示分辨率	1 mV
I 电流显示分辨率	1 mA
U 电压最大显示偏差	max. \pm 6 mV
U 电压常规显示偏差	typ. \pm 2 mV
I 电流最大显示偏差	max. \pm 3 mA
I 电流常规显示偏差	typ. \pm 1.5 mA
环境	+10°C...+35°C, 相对湿度 20...80 %, 无冷凝水
接口	CAN bus compatible, RS232
尺寸	448 mm x 140 mm x 330 mm (table housing) 483 mm x 132 mm (3HE) x 370 mm (19"- instrument)
重量	Approx. 8.7 kg